

SEWAGE PUMPS

any residential sewage application.

The Myers MSE50 residential sewage pumps are designed for high performance applications. With a recessed vortex impeller, this pump will easily pass 2" solids and pump up to 145 GPM. With a durable cast iron construction and reliable two-pole switch design, this pump is perfect for

Specifications

M Fl	1/E ODM/E/O L DM) - L EL			
Max Flow	145 GPM (549 LPM) at 5'			
Max Shut-off Head	22'(6.7 m)			
Solids Handling	2"(50.8 mm)			
Intermittent Liquid Temperature	130°F (54.4°C)			
Discharge, NPT	2"(50.8 mm)			
Motor/Electrical Data	115V 9A 1Ø/230V 4.6A 1Ø			
Acceptable pH Range	6-9			
Cord Length	10' or 20' (3.1 m or 6.1 m)			
Switch Type	Vertical			
Switch On/Off	9.75 (247 mm) / 5.75 (146 mm)			
Housing	Cast Iron			
Volute	Cast Iron			
Impeller	Thermoplastic recessed Vortex			
Shaft Seal	Mechanical			

Performance Data

Head	Flow GPM(LPM)			
5'	145			
10'	105			
15'	75			
20'	16			
22'	0			



Features

- Durable Construction


 Durable cast iron construction
 for heavy duty applications
- Reliable Switch Design
 The unique two-pole switch is protected with a guard to block debris
- Free-flow Design
 Recessed impeller design also
 improves the free flow of solids
 up to 2"
- **High Performance**Capable of pumping up to 145
 GPM and up to 22 feet of head


Ordering Information

Catalog Number	HP	Volts	Phases/ Cycles	Amps	Discharge Size	Switch Type	Cord Length	Approx. Wt. Lbs.
MSE5012P10	1/2	115	1	9.0	2" (50.8 mm)	2-Pole Auto	10′ (3.1 m)	43 (19.5 kg)
MSE5022P10	1/2	230	1	4.6	2" (50.8 mm)	2-Pole Auto	10′ (3.1 m)	44 (20.0 kg)
MSE5012P20	1/2	115	1	9.0	2" (50.8 mm)	2-Pole Auto	20'(6.1 m)	43 (19.5 kg)
MSE5022P20	1/2	230	1	4.6	2" (50.8 mm)	2-Pole Auto	20'(6.1 m)	44 (20.0 kg)


MYERS MSE50

DIMENSIONS

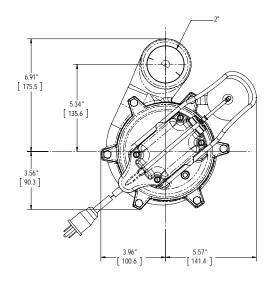

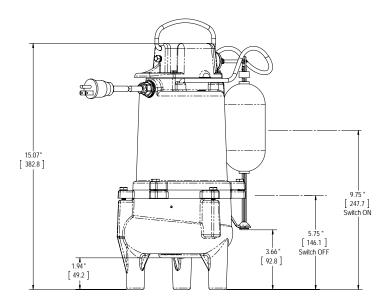

PUMP PERFORMANCE

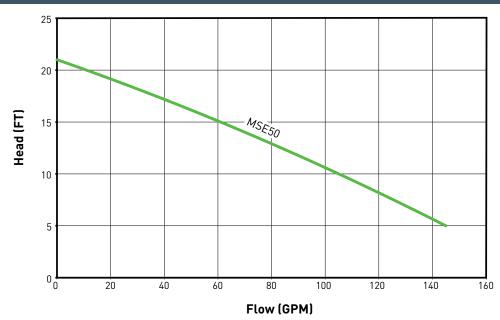



293 Wright Street Delavan, WI 53115 USA Ph: 888-987-8677 Orders Fax: 800-426-9446 490 Pinebush Road, Unit 4 Cambridge, Ontario, Canada N1T 0A5 CANADA

Ph: 800-363-7867 Orders Fax: 888-606-5484 www.femyers.com

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.

© 2018 Pentair plc. All Rights Reserved.